

Excellent accessibility and superior serviceability. Large removable 45° doors up to 330 kVA.

Easy access to coolant reservoir for no-spill top-up.

Installation-friendly design thanks to its dual-position air outlets.

Tough, rust-proof canopy keeps the unit looking good and while protecting all components.

To be used in the most noise-sensitive areas. Different noise-attenuation level enclosures.

Atlas Copco

GESAN
QIS 330

QIS 50 Hz

THE FULL RANGE

		kVA Prime/standby	kW Prime/standby		
QIS 10		9/10,2	7,2/8,2	QI 10	
QIS 16		13,8/16	11/12,8	QI 16	
QIS 25		20/21,5	16/17	QI 25	
QIS 35		29,7/32,5	23,8/26	QI 35	
QIS 45		42/46,3	33,6/37	QI 45	
QIS 60		60/48	60/66	QI 60	
QIS 95		85/95	68/76	QI 95	
QIS 115		105/115	84/92	QI 115	
QIS 140		130/143	104/114	QI 140	
QIS 220		200/220	160/176	QI 220	
QIS 330		300/330	240/264	QI 330	
QIS 470		410/470	328/376	QI 470	
QIS 510		460/509	368/407	QI 510	
QIS 580		524/580	419/464	QI 580	
QIS 630		571/630	457/504	QI 630	
QIS 700		635/700	508/560	QI 700	
QIS 735		680/735	544/588	QI 735	
QIS 830		752/830	601/664	QI 830	

COMMITTED TO SUSTAINABLE PRODUCTIVITY

We stand by our responsibilities towards our customers, towards the environment and the people around us. We make performance stand the test of time. This is what we call - Sustainable Productivity.

Atlas Copco

2959 6900 01 - Subject to modifications without prior notice. Copyright 2015, Atlas Copco Grupos Electrógenos Europa, Zaragoza, Spain

Photos and illustrations contained herein might depict products with optional and/or extra components which are not included with the standard version of the product and, therefore, are not included in a purchase of such product unless the customer specifically purchases such optional/extra components. We reserve the right to change the specifications and design of products described in this literature without notice. Not all products are available in all markets.

QIS RANGE

50 Hz

Gesan line, your solution for Predictable Power

Our QIS range of generators has been designed, manufactured and tested for a lifetime of service.

Atlas Copco

QIS RANGE

50 Hz


The **QIS range** is designed to combine maximum choice with exceptional reliability and performance.


From primary to critical backup power needs, these generators are designed for optimal performance in the most demanding conditions and all sectorial applications, from data centers and healthcare to manufacturing, utilities and retail.

Thanks to its versatility and user-friendliness, it can be easily integrated into all your projects.

Designed and built to the very highest standards, QIS range carries out extreme testing for both components and for the assembled units – resulting in exceptional reliability.

KEY BENEFITS



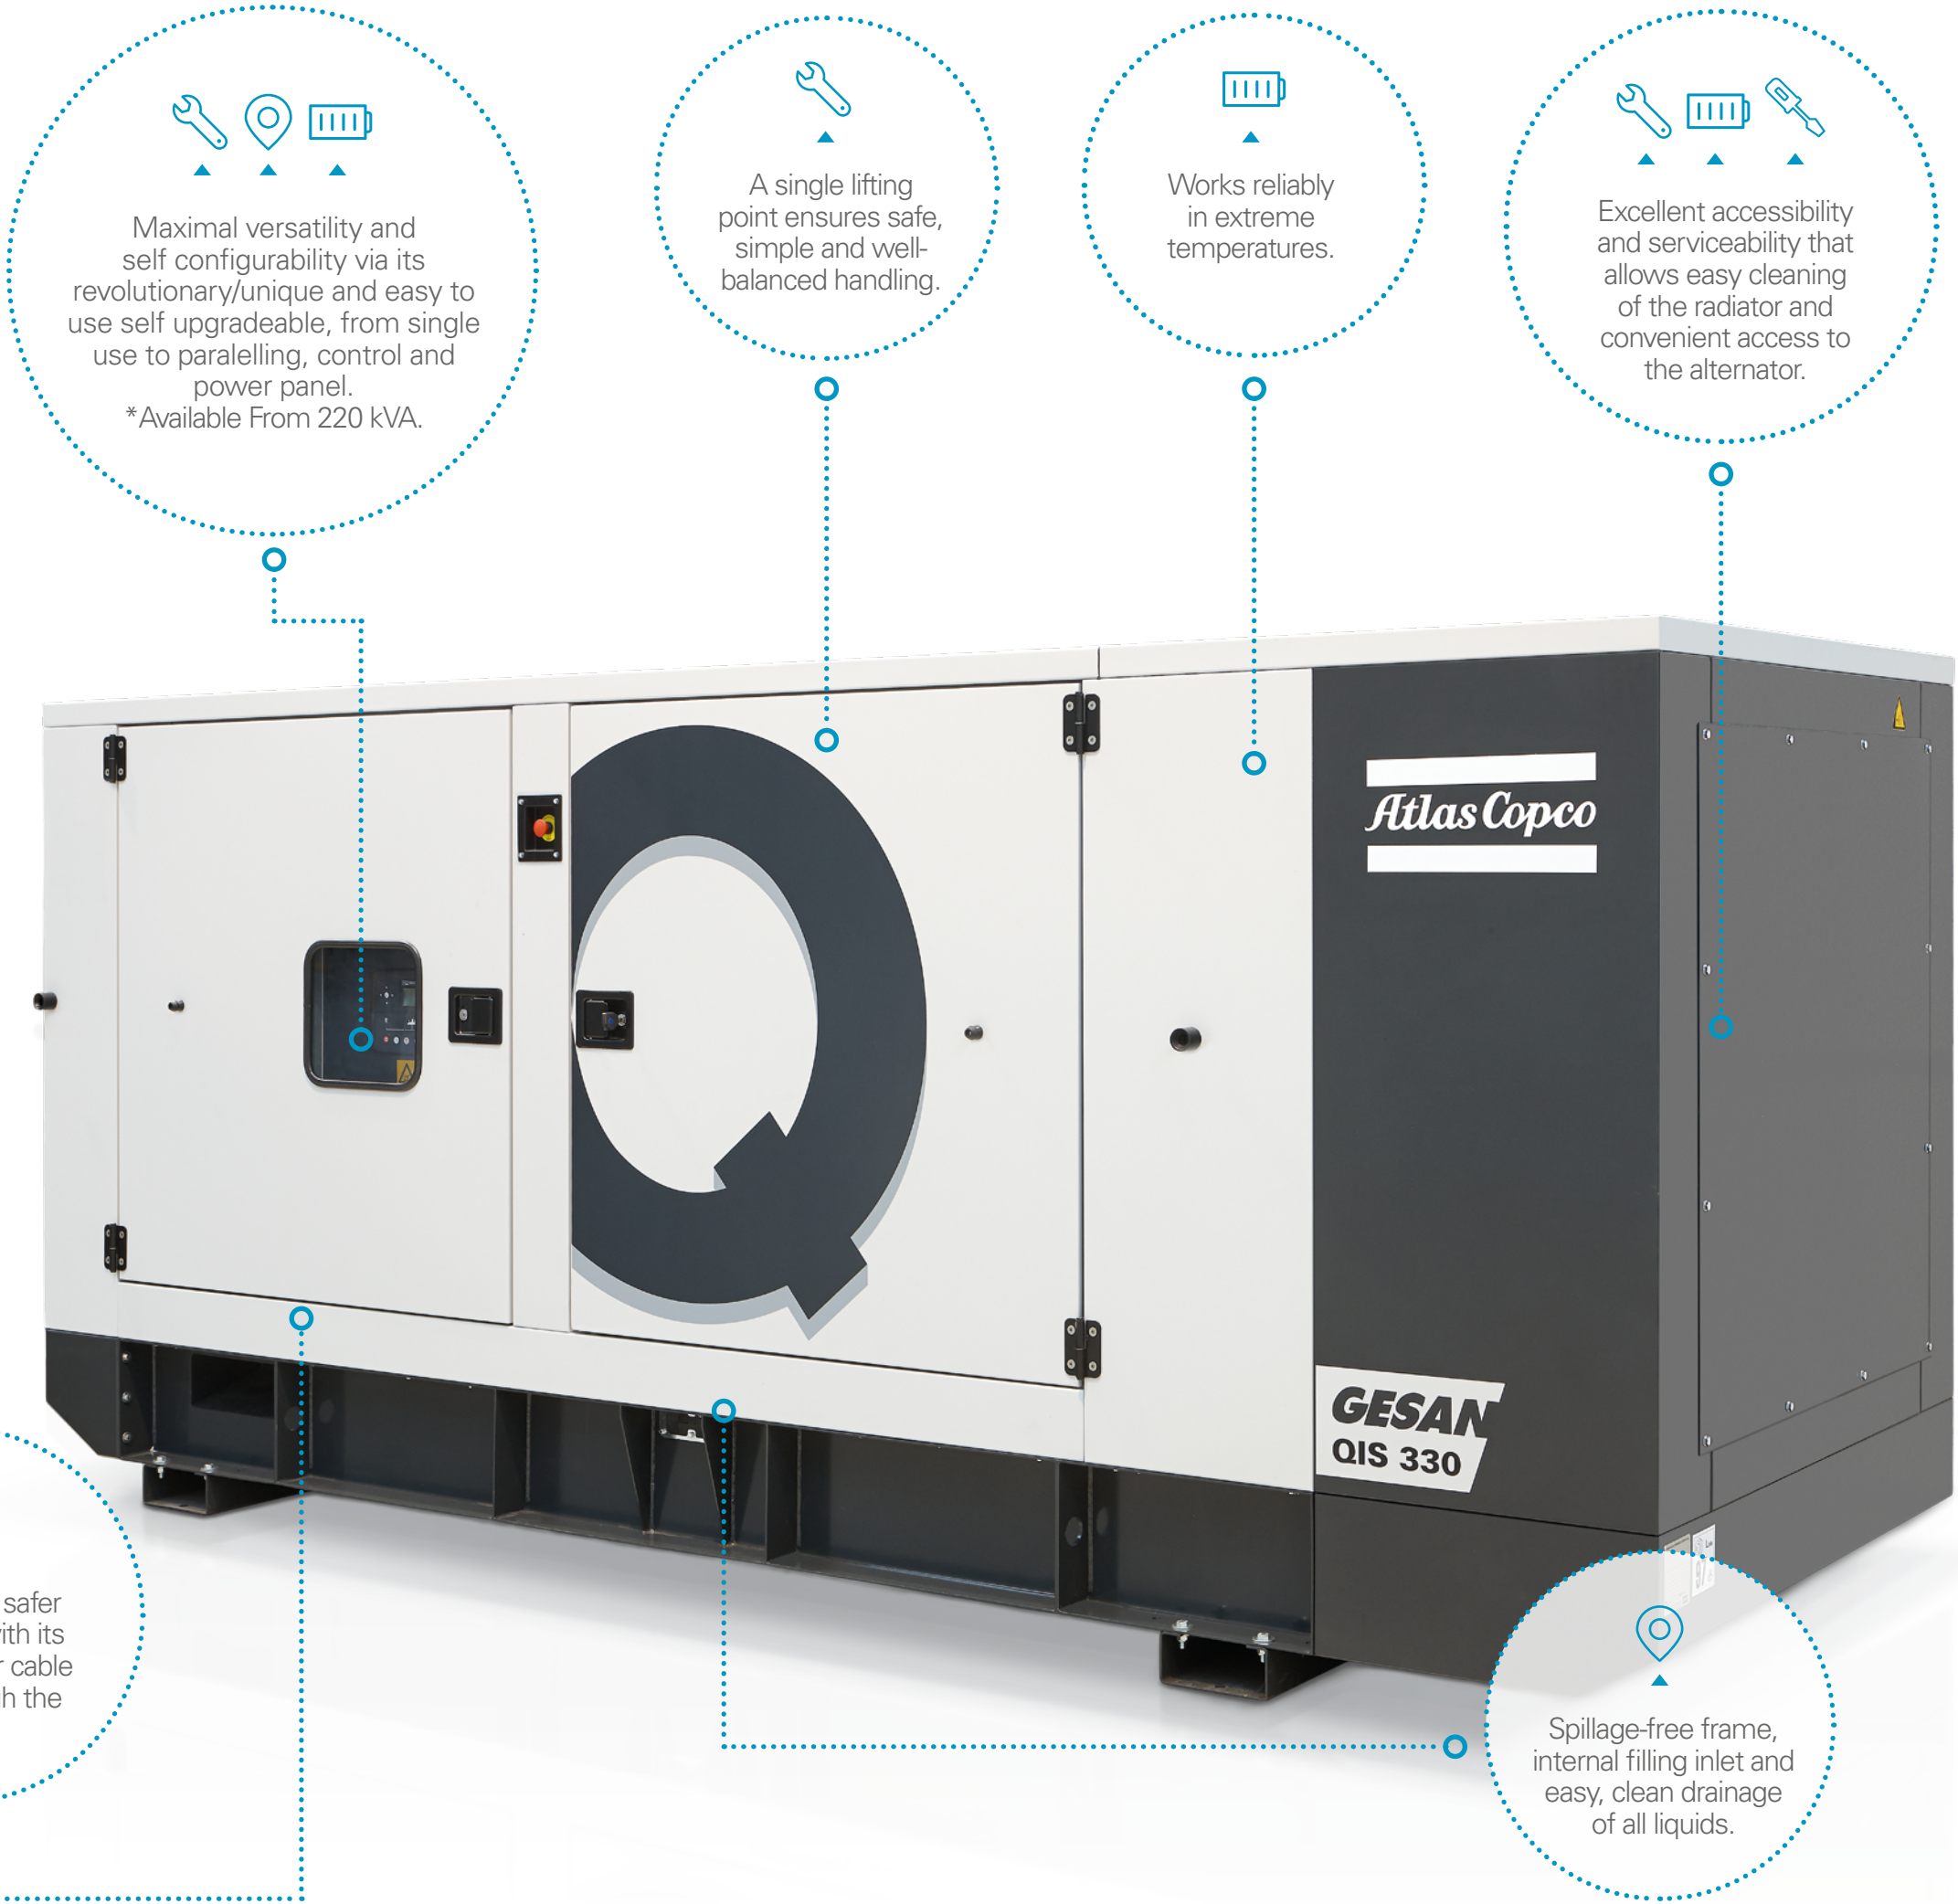


Easy installation	
Performance	
Noise attenuation	
Versatility	
Maintenance efficiency	



OPTIONS


The **QIS range** allows you to specify the configuration of your generator through a wide range of useful options. You can customize everything from the power output to the required level of noise suppression.

We will configure according to your requirements before your generator leaves the factory (Options listed below) or we will provide you with retrofit kits in order you can make changes after purchase quickly and efficiently.

	EASY INSTALLATION <ul style="list-style-type: none">o Lifting beam	<ul style="list-style-type: none">• External fuel tank connection• Shock absorber mounts and spring isolators
	PERFORMANCE <ul style="list-style-type: none">o Earth leakage relaylo High-capacity fuel tank up to 700kVAo Coolant heater	<ul style="list-style-type: none">• Fuel filter with water separator• Automated fuelling*• Diferent options available*
	NOISE ATTENUATION <ul style="list-style-type: none">o From low to high attenuation soundproofed enclosureso Silencer noise-attenuation levels for open-skid versions	
	VERSATILITY <ul style="list-style-type: none">o Control unit options*o Single-set communications device (RS485)o GPS access via external module	<ul style="list-style-type: none">• Remote monitoring and control via Webnet/3G/Ethernet• Remote display• Digital input/output expansion modules
	MAINTENANCE EFFICIENCY <ul style="list-style-type: none">o Protective covers for hot parts	<ul style="list-style-type: none">• Battery isolator switch

Option or as retrofit kit: • Option: o
*: Please contact us for additional information.

APPLICATIONS

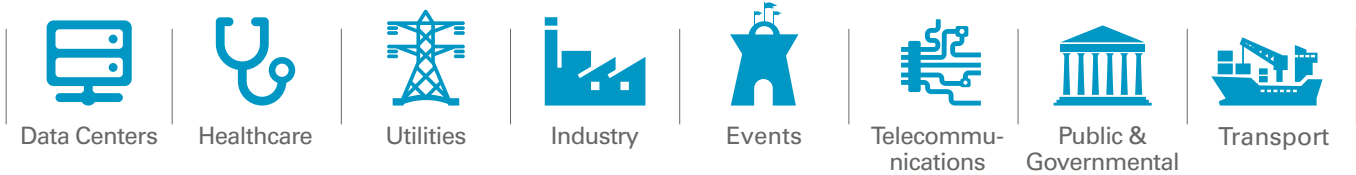

Excellent accessibility and superior serviceability. Large removable 45° doors up to 330 kVA.

Easy access to coolant reservoir for no-spill top-up.

Installation-friendly design thanks to its dual-position air outlets.

Tough, rust-proof canopy keeps the unit looking good and while protecting all components.

To be used in the most noise-sensitive areas. Different noise-attenuation level enclosures.

Atlas Copco

GESAN
QIS 330

QIS 60 Hz
THE FULL RANGE

		kVA Prime/standby	kW Prime/standby		
QIS 10		11/12,6	8,8/10,1	QI 10	
QIS 15		16,6/18,8	13,3/15	QI 15	
QIS 19		23/23,5	18,4/18,8	QI 19	
QIS 30		34/36,5	27,2/29,2	QI 30	
QIS 45		51/54	40,8/43,2	QI 45	
QIS 65		70/77	56/62	QI 65	
QIS 90		102/114	82/91	QI 90	
QIS 100		120/130	96/104	QI 100	
QIS 120		140/155	112/124	QI 120	
QIS 200		230/241	184/193	QI 200	
QIS 300		325/341	260/273	QI 300	
QIS 400		450/500	360/400	QI 400	
QIS 450		526/563	421/450	QI 450	
QIS 500		572/625	458/500	QI 500	
QIS 540		642/680	514/544	QI 540	
QIS 610		692/764	554/612	QI 610	
QIS 710		808/893	646/714	QI 710	
QIS 740		849/925	679/740	QI 740	

COMMITTED TO SUSTAINABLE PRODUCTIVITY

We stand by our responsibilities towards our customers, towards the environment and the people around us. We make performance stand the test of time. This is what we call - Sustainable Productivity.

Atlas Copco

Photos and illustrations contained herein might depict products with optional and/or extra components which are not included with the standard version of the product and, therefore, are not included in a purchase of such product unless the customer specifically purchases such optional/extra components. We reserve the right to change the specifications and design of products described in this literature without notice. Not all products are available in all markets.

QIS RANGE
60 Hz
Gesam line, your solution for Predictable Power

Our QIS range of generators has been designed, manufactured and tested for a lifetime of service.

Atlas Copco

QIS RANGE

60 Hz

The QIS range is designed to combine maximum choice with exceptional reliability and performance.


From primary to critical backup power needs, these generators are designed for optimal performance in the most demanding conditions and all sectorial applications, from data centers and healthcare to manufacturing, utilities and retail.

Thanks to its versatility and user-friendliness, it can be easily integrated into all your projects.

Designed and built to the very highest standards, QIS range carries out extreme testing for both components and for the assembled units – resulting in exceptional reliability.

KEY BENEFITS



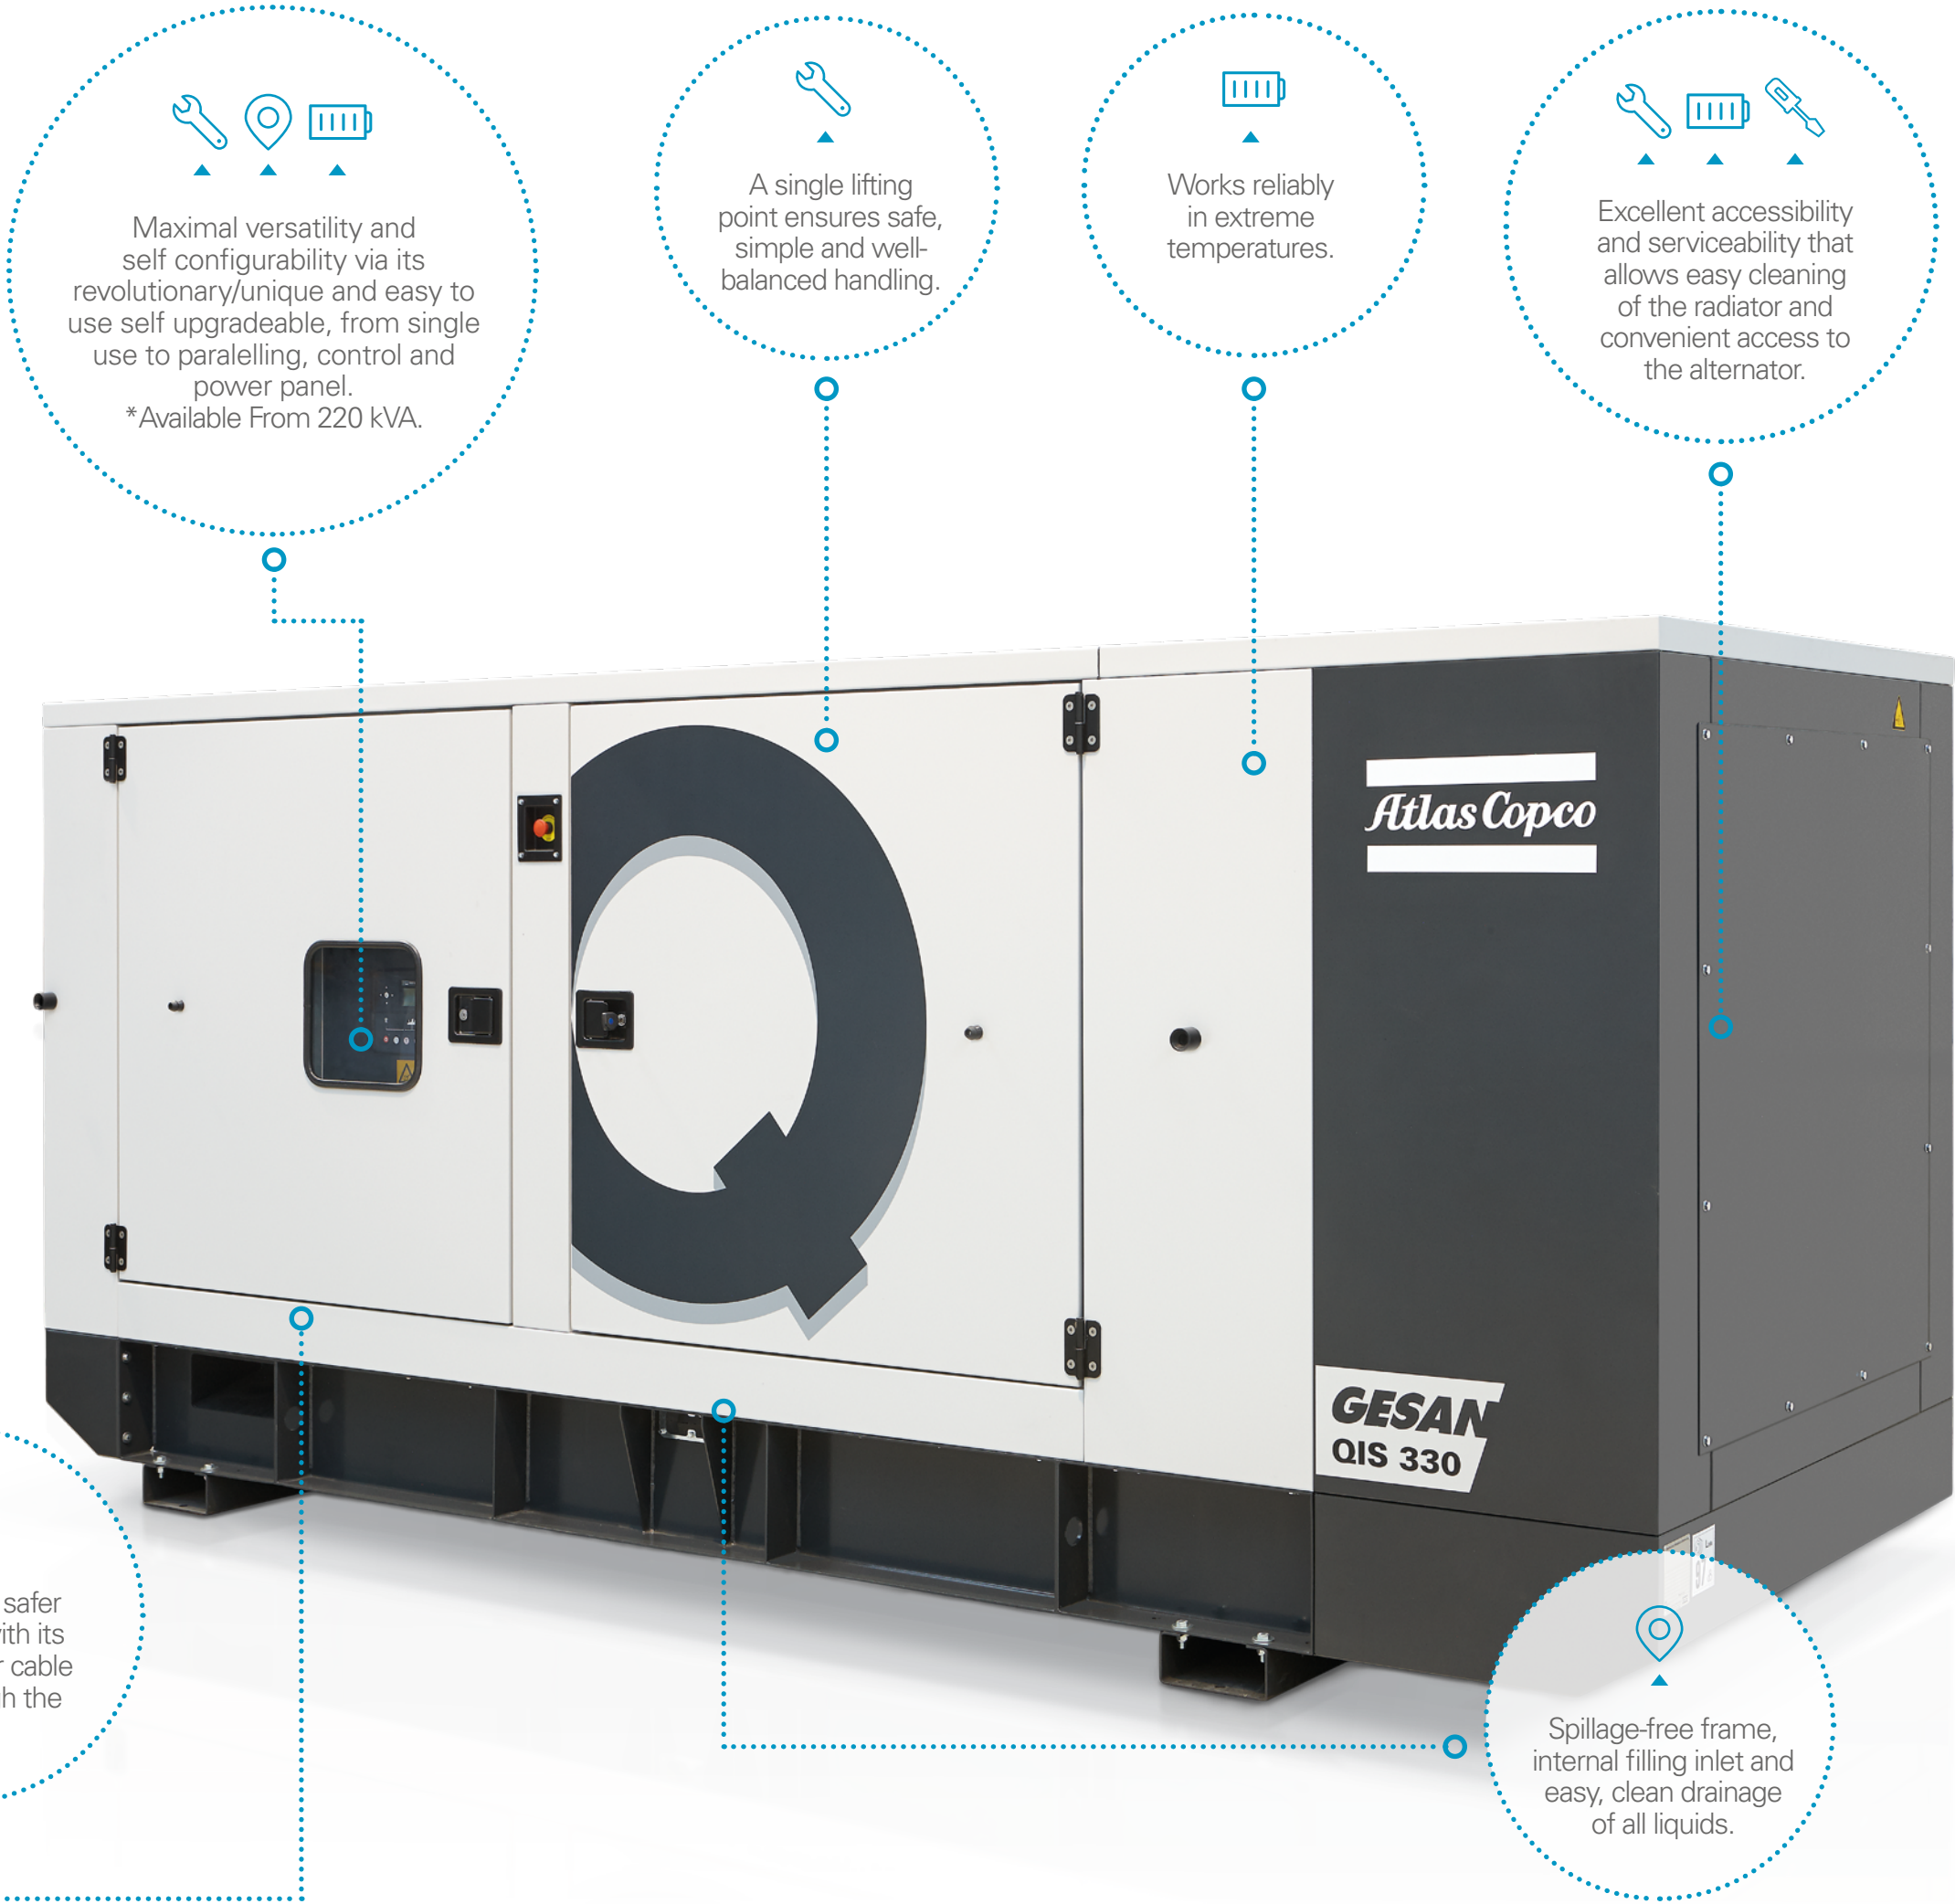


Easy installation	
Performance	
Noise attenuation	
Versatility	
Maintenance efficiency	



OPTIONS

The QIS range allows you to specify the configuration of your generator through a wide range of useful options. You can customize everything from the power output to the required level of noise suppression.

We will configure according to your requirements before your generator leaves the factory (Options listed below) or we will provide you with retrofit kits in order you can make changes after purchase quickly and efficiently.

	EASY INSTALLATION <ul style="list-style-type: none">o Lifting beam	<ul style="list-style-type: none">• External fuel tank connection• Shock absorber mounts and spring isolators
	PERFORMANCE <ul style="list-style-type: none">o Earth leakage relaylo High-capacity fuel tank up to 700kVAo Coolant heater	<ul style="list-style-type: none">• Fuel filter with water separator• Automated fuelling*• Diferent options available*
	NOISE ATTENUATION <ul style="list-style-type: none">o From low to high attenuation soundproofed enclosureso Silencer noise-attenuation levels for open-skid versions	
	VERSATILITY <ul style="list-style-type: none">o Control unit options*o Single-set communications device (RS485)o GPS access via external module	<ul style="list-style-type: none">• Remote monitoring and control via Webnet/3G/Ethernet• Remote display• Digital input/output expansion modules
	MAINTENANCE EFFICIENCY <ul style="list-style-type: none">o Protective covers for hot parts	<ul style="list-style-type: none">• Battery isolator switch

Option or as retrofit kit: • Option: o

*: Please contact us for additional information.

APPLICATIONS

